



10.1"

ZL101PC-C


- Intel ®Celeron J1900
- 4GB RAM Memory,128GB Industrial SSD
- Supports Windows 10 & Linux (32Bit,64Bit)
- Anti-glare surface treatment(chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- Optically bonded Touch Panel to LCD Panel
- Patented IP65 front with silicon seal
- Integrated W-LAN
- 2 year gurantee

Zuljana's Capacitive PC series stands out among competition with fanless silent operation,IP65 front panel design, high reliability and fine craftwork.

It is the perfect choice for industrial and business application.It has flat edge to edge glass with IP65 water and dust proof front panels and a sturdy aluminum case with stable VESA 100 fixation bolts (VESA 400 for 32" and up).

The touch PC is powered by Intel ®Celeron J1900,this version is equipped with 4GByte RAM ,128GB SSD and intel's HD Graphic chipset.

These Zuljana PCs are the perfect choice for a wide variety of application including POS system,contril panels in industrial fields,in Kiosk systems ,office /residence automation,digital signage and in areas like shopping malls,classrooms,hotels and many more.



Ordering information	
10.1"LCD,500 nits(Optional),800:1,1080×800 pixels, 21.80(H)×13.66(V),LED Backlight,J1900,4G,128G	

Product name	10.1"Capacitive Touch PC
Model Number	ZL101PC-C

IP Rating	
IP 65 Front / IP40 Back	

LCD Panel	
Screen diagonal (Inch/cm)	10.1/25.66
Active Display Area(cm)	21.80(H)×13.66 (V)
Aspect ratio	16:10
Physical resolution	1280×800
External Maximum showable resolution – HDMI, DP	1920×1200
Colours displayed	16.7M
Brightness (cd/m ²)	350
Contrast	800:1
Typical reaction time Tr/ Tf (ms)	10/15
Visual Angle horizontal/vertical (°)	170/170
Backlight / Backlight Lifetime (hours)	LED / 20,000



Operation/Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	2.3
Gross weight (kg)	4.0 (incl.cartonage)
Housing material	Aluminum case
Housing (mm) L×W×H	260.2 × 178.2 × 50.8
Mounting	VESA 100

PC System	
CPU	Intel® Celeron™ QuadCore J1900
Chipset	Intel® E3800
Graphic GPU	Intel® HD Graphics
Audio	Realtek 887 8 -channel high definition audio codec, Audio Amplifier EUA 2012A
Memory	4GB DDR3L non-ECC
Storage (Switchable)	Zuljana Industrial 128GB SSD
Network	2x Realtek PCIe GB LAN 8111G; W-LAN
Driver Support	Win7/8/10; Linux; 32Bit/64Bit
Pre-installed OS	Linux Ubuntu

Touch Panel	
Touch Technology	Projected Capacitive 10-point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Touch Controller	USB

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 12V DC-Out
Working Power (V)	12
Working Power (V)	16
Stand-By Consumption	<1

External Connectors	
1 × 12V DC-In	
1 × W-LAN antenna connector	
1 × USB 3.0	3 × USB 2.0
1 × HDMI	1 × MIC-In & EAR-Out
2 × COM Port FULL-PIN-RS232/485;5V/12V	
2 × 10/100/1000 Mbit RJ45 Ports	

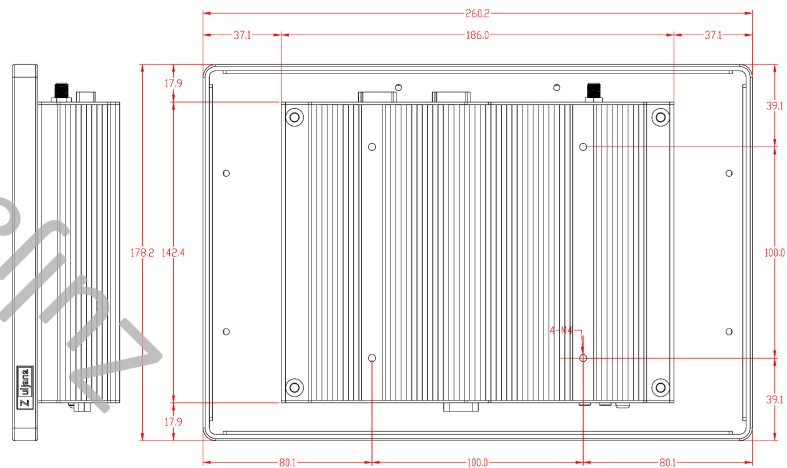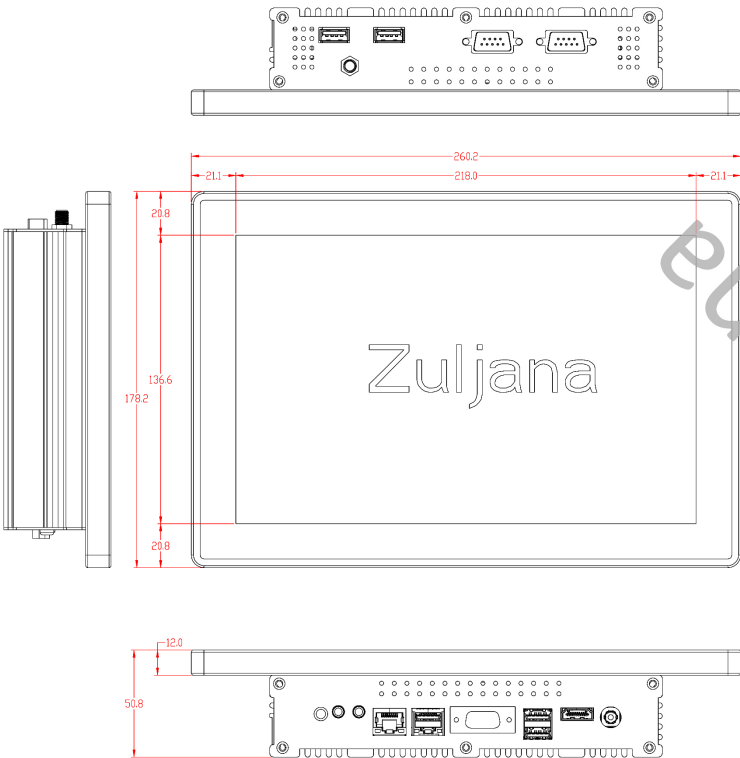

Shenzhen BaoBao Industrial Co., Ltd

Tel: +86 0755 23775660

Email: sales@baobao-industries.com

Website: www.baobao-industries.com

Website: www.baobao-industries.com

Address: 2 / F, Building B, Xinzhongtai Science and Technology Park,
Guangming New District, Shenzhen